


XLT[®]

SmartSolutions[™]

2336







G-version Oven

23" WIDE CONVEYOR
36" LONG BAKE CHAMBER
GAS & ELECTRIC

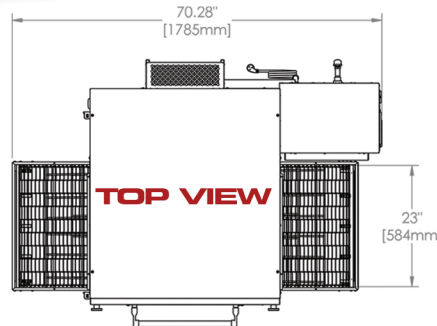

FRONT VIEWS

SIDE VIEWS

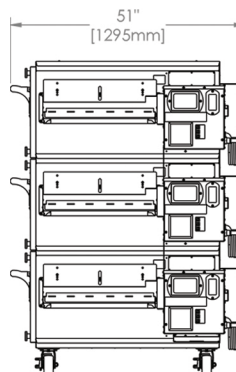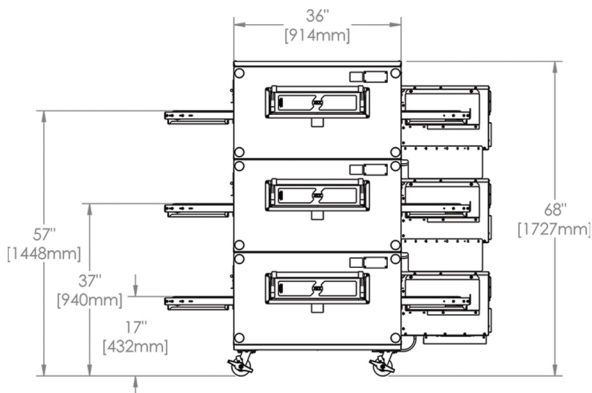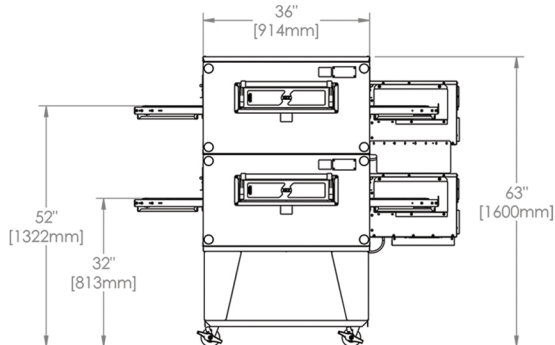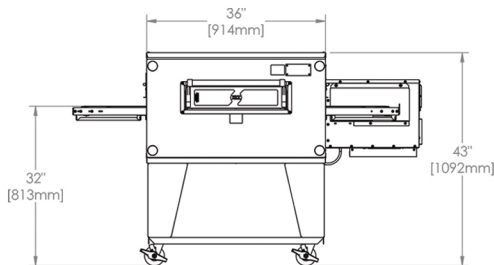

GAS OVEN

HEATING VALUES

STANDARD
BTU/Hr: 71,000

WORLD
Natural: 20.80 Kw/Hr
74.88 MJ/Hr
Propane: 20.80 Kw/Hr
74.88 MJ/Hr
Butane: 23.15 Kw/Hr

ELECTRICAL REQUIREMENT

STANDARD
120 VAC, 4.8 Amps
50/60 Hz

WORLD
220/230/240 VAC Option
3 Amps, 50/60 Hz

INLET PRESSURE RANGE

NATURAL GAS

W/C: 6 - 14
mbar: 15 - 35
kPa: 1.50 - 3.50
kPa (Korea): 1.50 - 2.50

PROPANE GAS

W/C: 11.5 - 14
mbar: 27.5 - 35
kPa: 2.75 - 3.50
kPa (Korea): 2.30 - 3.30

MANIFOLD PRESSURE RANGE

NATURAL GAS

W/C: 3.5
mbar: 8.75
kPa: 0.875

PROPANE GAS

W/C: 10
mbar: 25
kPa: 2.50

WEIGHT

Single: 710 lbs / 322 kg
Double: 1331 lbs / 604 kg
Triple: 1912 lbs / 867 kg

ELECTRIC OVEN

ELECTRICAL REQUIREMENT

STANDARD

208/240 VAC
45/39 Amps, 60 Hz
4 Wire Service -
L1, L2, L3
+ 1 Ground (per oven)
3 Phase, 16 Kw

WORLD

380/415 VAC
31/24 Amps, 50 Hz
5 Wire Service -
L1, L2, L3
N + 2 Grounds (per oven)
3 Phase, 16/15 Kw

WEIGHT

Single: 653 lbs / 296 kg
Double: 1191 lbs / 540 kg
Triple: 1530 lbs / 694 kg

WARRANTY

USA & CANADA
7 YEARS

INTERNATIONAL
5 YEARS

*A MINIMUM OF A 1½" GAS SUPPLY LINE IS REQUIRED. THE GAS LINE MUST BE PLACED TO THE SIDE OF THE OVEN AND CANNOT BE BEHIND THE CONTROL BOX.

WWW.XLTOVENS.COM

24/7/365 LIVE TECHNICAL SUPPORT

service@xltovens.com

(316) 943-2751

sales@xltovens.com

